

# Grp Roof Supports Struts

## GRP Water Storage Hollow Roof Support Replacements

Why are hollow roof supports not advised?

The UK Department of Health issued the alert EFA/2013/004 on November 19<sup>th</sup> 2013, which stated that hollow tank supports are no longer permitted in cold water storage tank installations.

This regulation is supported by the new AcoP L8 legislation provided by the Health and Safety Executive, which highlights the risks associated with stagnant water in these supports, particularly the potential for Legionella bacteria growth.

### Purewater Storage LTD offer various services:

- 1. Supply Only** - Purewater can offer the struts as supply only for installations by others.
- 2. Supply & Install** - Purewater can attend site and fit these in an existing water storage tank. (Draining, cleaning & chlorination by others).
- 3. Supply - Install - Chlorinate and Place Online** - Purewater can attend site, install the roof support struts, clean & then chlorinate the existing water storage tank & place online.



Internal view of GRP hollow roof support struts highlighting biofilm issues



Before - showing hollow roof support struts installed


### To get a competitive quotation we simply need a few details:

1. Tank size, ie 4x2x1m high
2. Tank Location - Postcode ideally
3. Tank type - IFB - EFB - TIF
4. Any images available from the inside and outside of the tank

Then simply choose which service you require.

Email all of the above to: [info@purewaterstorage.co.uk](mailto:info@purewaterstorage.co.uk)

These are also available on our website: [www.purewaterstorage.co.uk](http://www.purewaterstorage.co.uk)

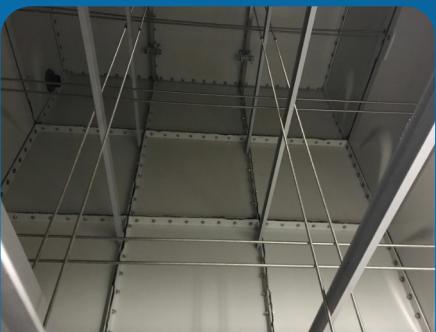

After - showing replacement solid roof support struts installed

### Non compliant hollow roof support struts



### Compliant solid roof supports struts

