


DNP R-2F-M

Fiber Optic Redundancy Node

For an independent EN54-13
Life safety Communication
Network layer

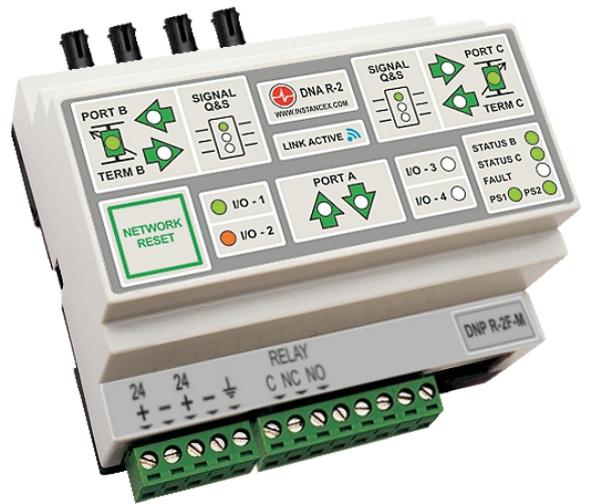

Overview

The DNP R-2F-M, Fiber Optic Redundancy Node for Ring Topology Networks, has been developed by INSTANCE to facilitate dynamic network management.

The equipment is designed to improve the Quality of Service (QoS) of critical communication networks while operating under the performance criteria required by EN54-13 and BS5839 part 1.

The DNP R-2F-M is a two port fiber optic node module allowing for fiber optic Class A redundant ring topologies. The fiber optic ports connected to the communications ring are continuously monitored to ensure optimum signal quality. This continuous signal monitoring allows for the system to adjust the communication paths in the event of physical cable parameter changes.

Features

- Independent Reporting with Class A communication redundancy
- Multiple fault tolerance
- Dual and single Industrial Equipment RS485 connection
- Can operate on Hosted Fiber / Ethernet links
- Simple LED System Status indication for data performance and independent port activity
- Signal quality and amplitude visual indication
- Wireless Connectivity for remote monitoring using a Blue tooth or WiFi communication connection
- Baud rate selectable from 9600 -115kbits/sec




Instance
Managing Data Xchange

Specifications

Dimension Diagram

Dimensions: 105 X 58 X 102 mm
 Weight: 0.2kg
 Din Rail Mount: EN60715 (width 35 mm)

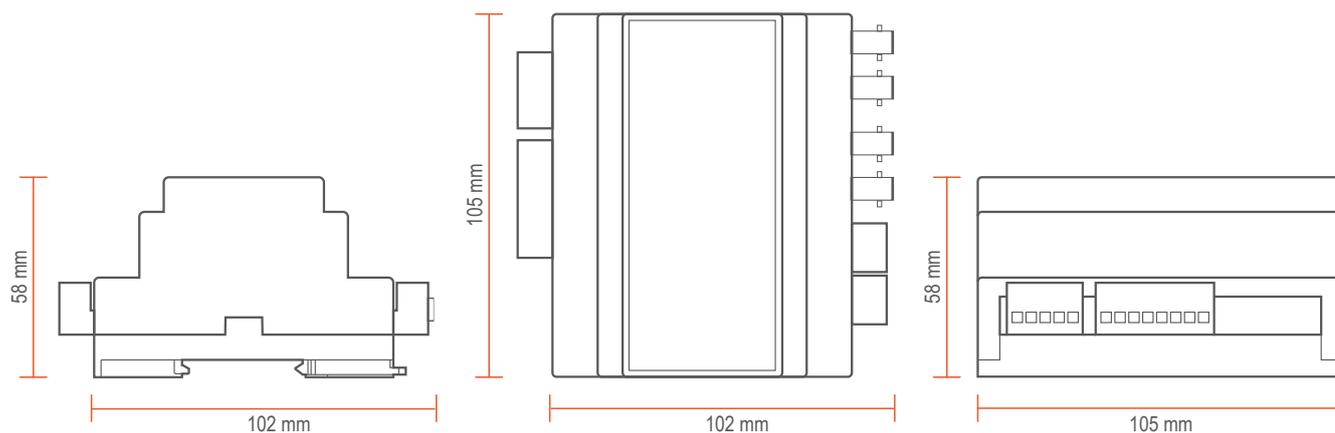

Power

Operating voltage: 18 to 36V (24V DC nominal)
 Rated current: 350mA (at 24V)

Interfaces

RS485: Port A1: Fixed Termination, in accordance with EIA RS-485
 Port A2: Fixed Termination, in accordance with EIA RS-485
 Fiber Optic: Port B: Fiber Optic, ST connector (SC on request), 1300nm, 62.5/125 μm and 50/125 μm fiber cables
 Port C: Fiber Optic, ST connector (SC on request), 1300nm, 62.5/125 μm and 50/125 μm fiber cables

Temperature

Operating: -10 to 50°C
 Storage: -40 to 70°C

Agency Approvals and Standards

CE, RoHs, WEEE compliant
 EMC EN 61000-6-2, Immunity Standard (Industrial Environments)
 EN 61000-6-4, Emission Standard (Industrial Environments)
 Safety EN 60950, IT Equipment

