




FENCINGDIRECT


Twinwire Gates

- Conforms to BS 1722 Pt 14
- Available in 1.8m, 2.0m, 2.4m & 3.0m heights
- Single leaf gates can be supplied either left or right hand hung
- Double gates fitted with lockable drop bolts
- Hot dip galvanised and polyester powder coated in RAL 6005 or RAL 9005 with 5 year coating warranty as standard
- Galvanised anti-vandal fixings supplied as standard
- Other colour and size options on

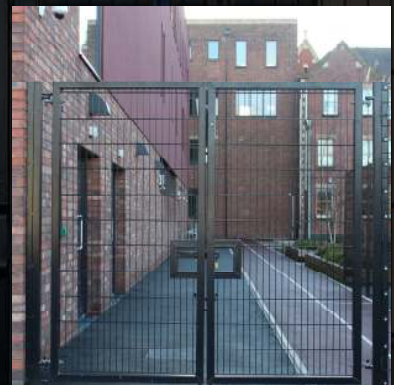



FENCINGDIRECT

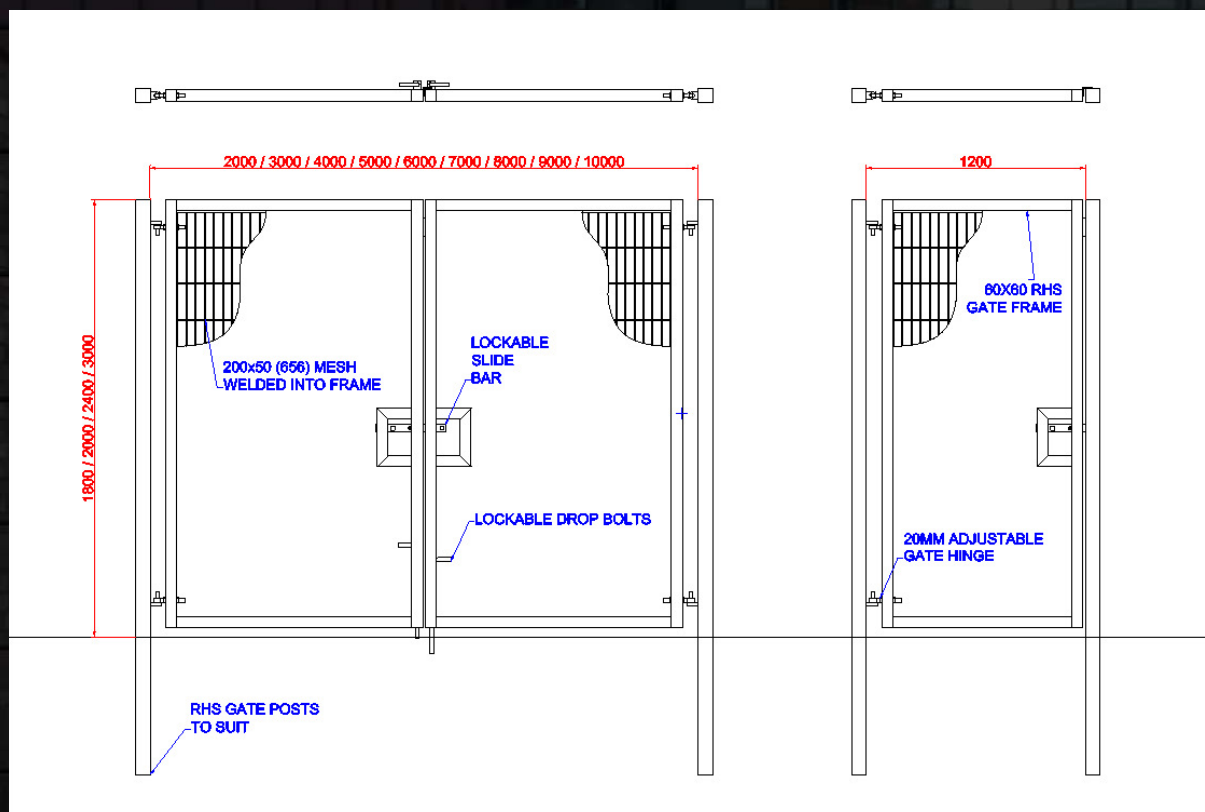

| | | | Height of gate from ground level | |
|-----------------------------|--------|-------------------------------|----------------------------------|-----------------|
| | | | 1800mm | 2400mm |
| Width of gate between posts | 1200mm | Single leaf - Right hand hung | #1800SLTW1200RH | #2400SLTW1200RH |
| | 1200mm | Single leaf - Left hand hung | #1800SLTW1200LH | #2400SLTW1200LH |
| | 2000mm | Double leaf | #1800DLTW2000 | #2400DLTW2000 |
| | 3000mm | Double leaf | #1800DLTW3000 | #2400DLTW3000 |
| | 4000mm | Double leaf | #1800DLTW4000 | #2400DLTW4000 |
| | 5000mm | Double leaf | #1800DLTW5000 | #2400DLTW5000 |
| | 6000mm | Double leaf | #1800DLTW6000 | #2400DLTW6000 |