



## 3M™ Sun Control Window Film Prestige 40 Exterior

- Spectrally selective, multilayer nano-technology
- Optimal visible light transmission and heat rejection performance
- Reduces solar heat gain keeping occupants cool and comfortable
- Reduces heating and cooling costs
- Extends the life and vibrancy in furniture, fittings and fabrics
- Reduces the risk of injury from flying glass




# 3M™ Sun Control Window Film Prestige 40 Exterior

## Description

With **3M's Prestige Series** you can enjoy the benefits of a world-class window film while leaving the window appearance virtually unchanged. Prestige Series nano-technology can significantly reduce heat gain and create a comfortable environment, as well as helping to reduce the workload of air conditioners and save energy costs. Because the films use no metal, they are not susceptible to corrosion, plus Prestige Series Window Films offer reflectivity that is actually lower than glass.

**Prestige 40 Exterior** is a multi layer and metal free film based on nanotechnology. It has a uniquely high visual light transmission for a film that has exceptionally high heat rejection capabilities. The film also reduces glare and blocks almost the entire amount of UVA and UVB rays which are the main cause of fading and skin damage. The patented multi layer construction and manufacturing process ensures an even longer warranty and life expectancy compared to other exterior film technologies.

## Solar Performance and light transmission

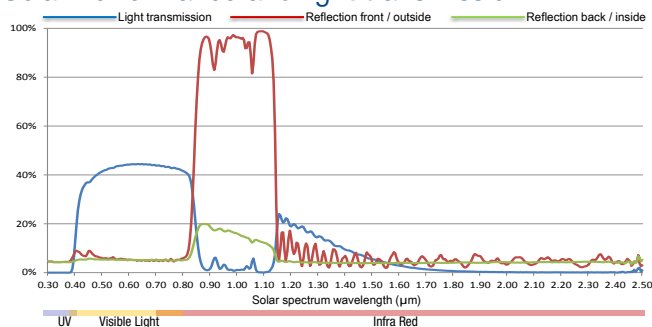

## Features (on 6 mm clear glass)

|                             |       |
|-----------------------------|-------|
| Total Solar Energy Rejected | 61%   |
| Near IR reduction           | 97%   |
| Glare reduction             | 52%   |
| UV rays blocked             | 99.9% |

## Film properties

|                            |                             |
|----------------------------|-----------------------------|
| Thickness without adhesive | 0.062mm / 62µm              |
| Colour                     | Tinted                      |
| Material                   | Co-extruded PET/coPMMA      |
| Adhesive                   | Pressure sensitive acrylic  |
| Top coating                | Scratch resistant hard coat |

## Installation

**Prestige Series** exterior films are installed using water and a soap solution. They are faster drying than other films, resulting in a faster installation time. Full adhesion is reached after approximately 8 - 10 days at 18°C (in dry conditions). Edge sealing of Prestige Exterior Series is not required on vertical applications, except where moisture can pool/ accumulate for an extended time. Edge sealing on horizontal / sloped applications is recommended. A recommended edge sealant is 3M™ Marine Sealant 3200.

## Cleaning

3M Window Films may be cleaned 30 days after installation using ordinary window cleaning agents and avoiding the use of abrasive particles. Do not use rough sponges, cloths or brushes. Synthetic sponges, soft wipes or rubber squeegee cleaners are recommended.

| Glass Type         | Film Type on 6mm Glass | Visible Light Transmission | Visible Reflection Exterior | Visible Reflection Interior | Heat Gain Reduction | G-value (Solar Heat Gain Coefficient) | Total Solar Energy Rejected |
|--------------------|------------------------|----------------------------|-----------------------------|-----------------------------|---------------------|---------------------------------------|-----------------------------|
| <b>Single Pane</b> |                        |                            |                             |                             |                     |                                       |                             |
| Clear              | No film                | 89%                        | 8%                          | 9%                          | N/A                 | 0.82                                  | 19%                         |
|                    | <b>PR 40 Ext</b>       | <b>42%</b>                 | <b>6%</b>                   | <b>5%</b>                   | <b>53%</b>          | <b>0.39</b>                           | <b>61%</b>                  |
| Tinted             | No film                | 53%                        | 6%                          | 6%                          | N/A                 | 0.63                                  | 37%                         |
|                    | <b>PR 40 Ext</b>       | <b>25%</b>                 | <b>5%</b>                   | <b>5%</b>                   | <b>47%</b>          | <b>0.33</b>                           | <b>67%</b>                  |
| <b>Double Pane</b> |                        |                            |                             |                             |                     |                                       |                             |
| Clear              | No film                | 79%                        | 15%                         | 15%                         | N/A                 | 0.70                                  | 30%                         |
|                    | <b>PR 40 Ext</b>       | <b>37%</b>                 | <b>7%</b>                   | <b>13%</b>                  | <b>59%</b>          | <b>0.29</b>                           | <b>71%</b>                  |
| Tinted             | No film                | 47%                        | 8%                          | 13%                         | N/A                 | 0.51                                  | 49%                         |
|                    | <b>PR 40 Ext</b>       | <b>22%</b>                 | <b>6%</b>                   | <b>12%</b>                  | <b>55%</b>          | <b>0.23</b>                           | <b>77%</b>                  |

The technical information, recommendations and other statements contained in this document are based upon European and/ or US tests or experience that 3M believes are reliable, but the accuracy or completeness of such information is not guaranteed. Many factors beyond 3M's control and uniquely within the user's knowledge and control can affect the use and performance of a 3M product in a particular application. Given the variety of factors that can affect the use and performance of a 3M product, the user is solely responsible for evaluating the 3M product and determining whether it is fit for a particular purpose and suitable for user's method of application. The information provided in this report is believed to be reliable; however, due to the wide variety of intervening factors, 3M does not warrant that the results will necessarily be obtained. All issues regarding warranty and liability for the product and the effect of its use are governed in accordance with the provisions of the appropriate contract of sale unless local laws dictate otherwise.



**Renewable Energy Division**  
**3M United Kingdom plc**  
 3M Centre  
 Cain Road, Bracknell  
 Berkshire RG12 8HT  
 3M.eu/WindowFilm

Please recycle.  
 © 3M 2013. All rights reserved.