


RIPDEXG

PERFORAZOR RANGE

HANDLING OF BARBED WIRES

- Handling of sharped barbed wires, perimeter security
- Safety
- Metal and Glass works

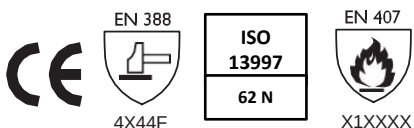

ISO 13997	A	B	C	D	E	F
Cutting load in Newtons	≥ 2	≥ 5	≥ 10	≥ 15	≥ 22	≥ 30

AET N°0075/011/162/10/19/3218 (CTC LYON)

STANDARDS (DETAILS ON WEB SITE)
www.rostaing.com/normes-securite

SIZES

6 7 8 9 10 11 12

COMPOSITION

Glove Oil resistant & water resistant cow split leather
Lining Stainless steel, HPPE, polyamide knitted glove
Total length 35 cm

CARE



PACKAGING

Bag of 5 pairs – Box of 20 pairs


Maximum cut resistance
 Technological weave



Forearm protection
 Cuff length 15 cm



Contact heat resistance

Thermal insulation :
 100 °C for 15 seconds minimum

Oil resistant and water resistant leather



Perforation resistance
 Cow split leather



Vein patch



RANGE
 PERFORAZOR

ROSTAING 17 Av. Charles de Gaulle - 01800 Villieu - FRANCE
 Tél +33(0)474 460 710 - Fax +33(0)474 613 443

ROSTAING.COM