


3 No 40mm Encapsulated
RHS Steel bracing

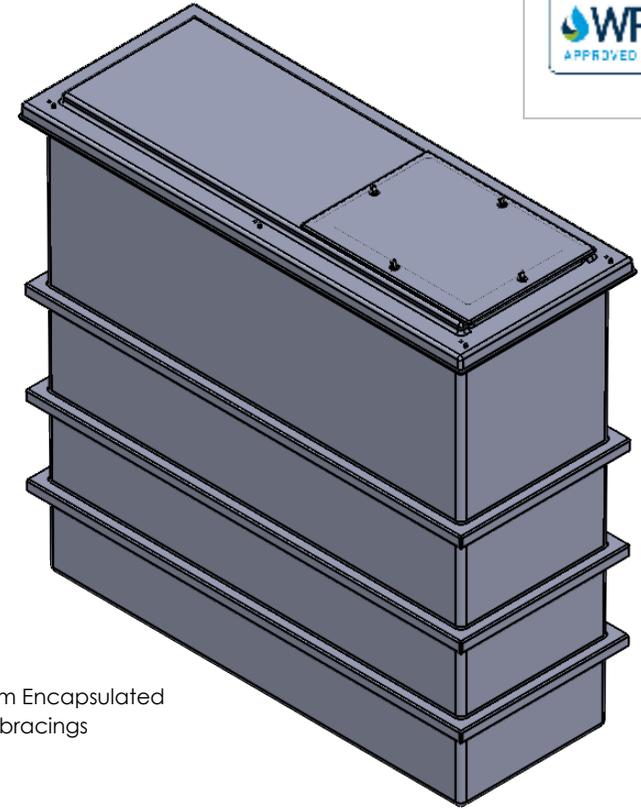

TITLE
PW1125.INS.AG

DRAWN BY **C.MORRIS** DATE **05/05/2023**

CUSTOMER
CUSTOMER

NOTE:
All Purewater tanks must be fully supported on a flat level & continuous foundation providing structural support to the tank when full to maximum operating capacity. It is essential that the user refers to the conditions of installation document prior to the installation of the tank. Under no circumstances should the tank body be used to provide support to pipework and ancillary items. The tank lid is a structural part of the tank and must be in place and fitted correctly when water is contained within the tank.

ALL DIMENSIONS +/- 5mm
UNLESS OTHERWISE STATED

A4

DESCRIPTION:
PW1125 one piece cold water storage tank
suitable for AG/AF Air gap

ALL DIMENSIONS IN MM - DO NOT SCALE

DATE	VERSION	NOTES
21/10/2019	A	FIRST ISSUE

TANK SPECIFICATION :

INTERNAL DIMENSIONS	1500 x 500 1500mm
EXTERNAL DIMENSIONS	1665 x 665 x 1577mm
NOM. CAPACITY	1125 Litres
DRY WEIGHT	85 KG
INSULATION THICKNESS	25mm
WRAS CERT. NUMBER	131006
MATERIAL	GRP



SCALE:1:20

SHEET 1 OF 1