

6

5

4

3

2

1

D

2192





C

2692

B

1593

A

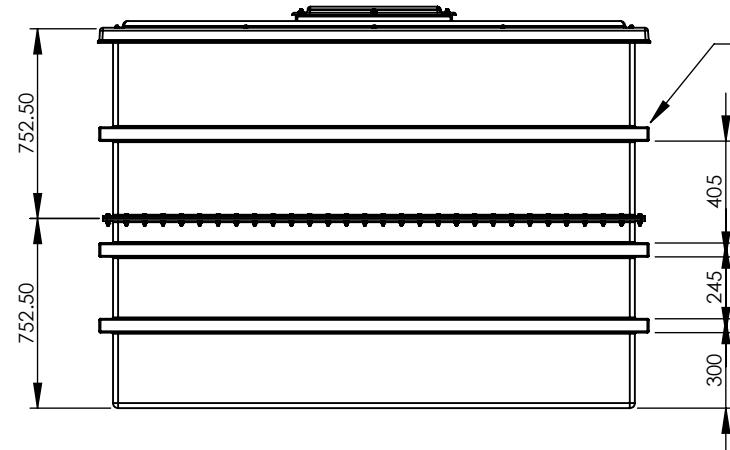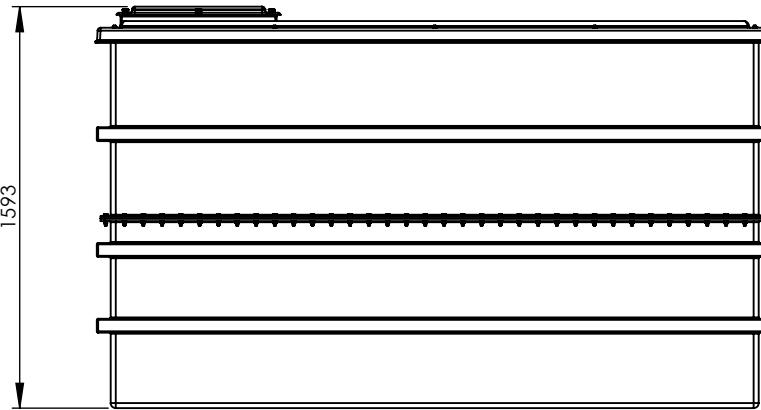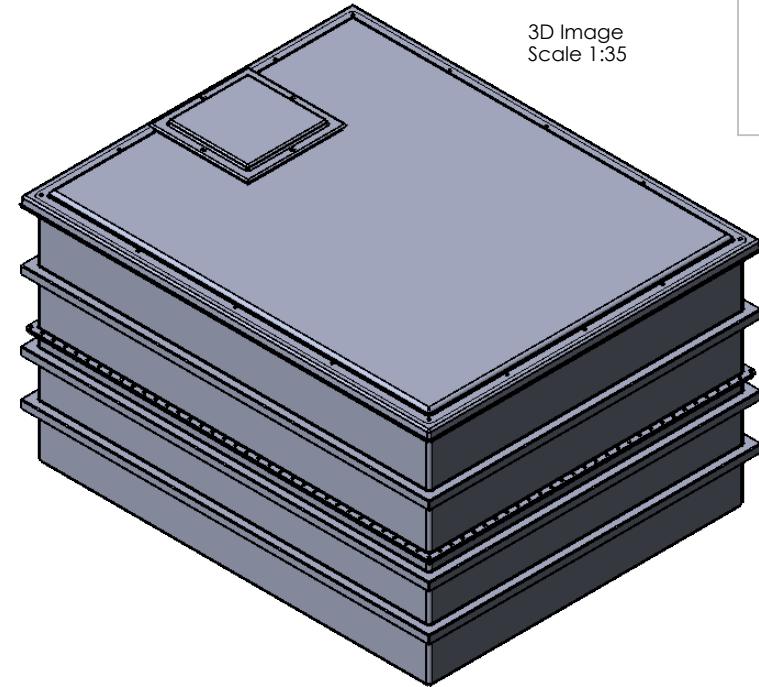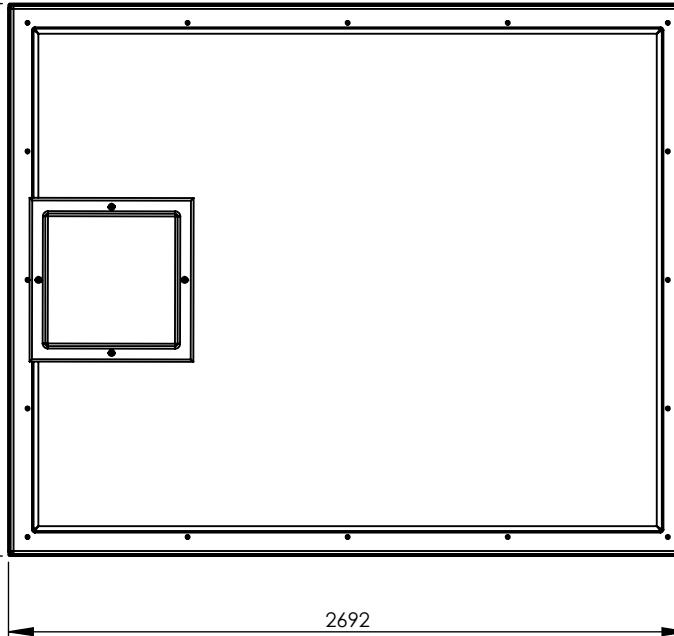

**TITLE**  
PW7500.INS-2.AG

**NOTE:**  
All Purewater tanks must be fully supported on a flat, level & continuous foundation providing structural support to the tank when full to maximum operating capacity. It is essential that the user refers to the conditions of installation document prior to the installation of the tank. Under no circumstances should the tank body be used to provide support to pipework and ancillary items. The tank lid is a structural part of the tank and must be in place and fitted correctly when water is contained within the tank.

DRAWN BY C.MORRIS DATE 05/12/2017

CUSTOMER

CUSTOMER  
ALL DIMENSIONS +/- 5mm  
UNLESS OTHERWISE STATED

A4

**DESCRIPTION:**

PW7500-2 piece cold water storage tank  
suitable for AG/AF Air gap

ALL DIMENSIONS IN MM - DO NOT SCALE

DATE 06/11/2017 VERSION A NOTES FIRST ISSUE

INTERNAL DIMENSIONS	2500 x 2000 x 1500mm
EXTERNAL DIMENSIONS	2692 x 2192 x 1593mm
NOM. CAPACITY	7500 Litres
DRY WEIGHT	380 KG
INSULATION THICKNESS	25mm
WRAS CERT. NUMBER	131006
MATERIAL	GRP

TANK SPECIFICATION :
purewater storage ltd

SCALE:1:30 SHEET 1 OF 1

6

5

4

3

2

1