


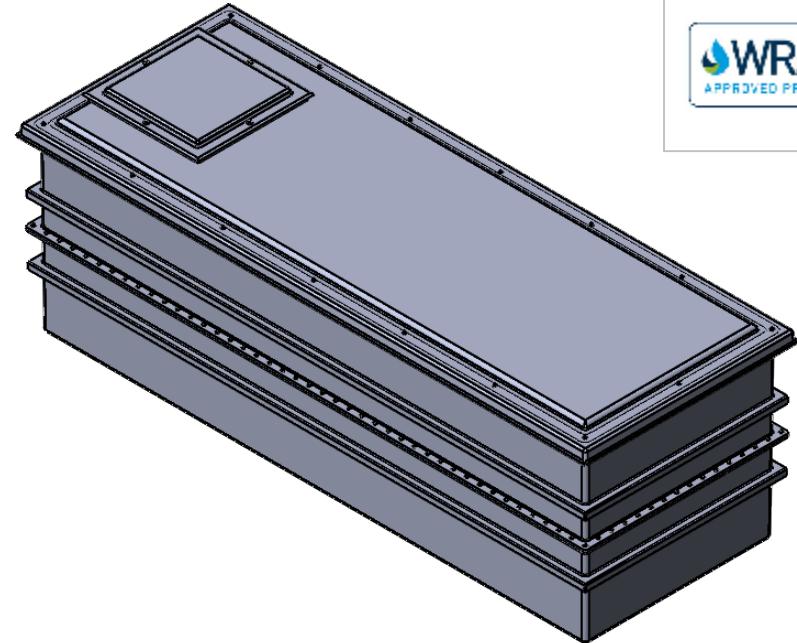


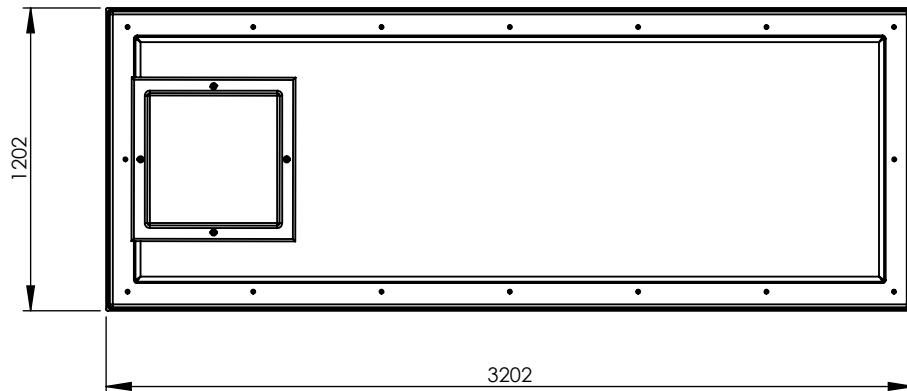

D

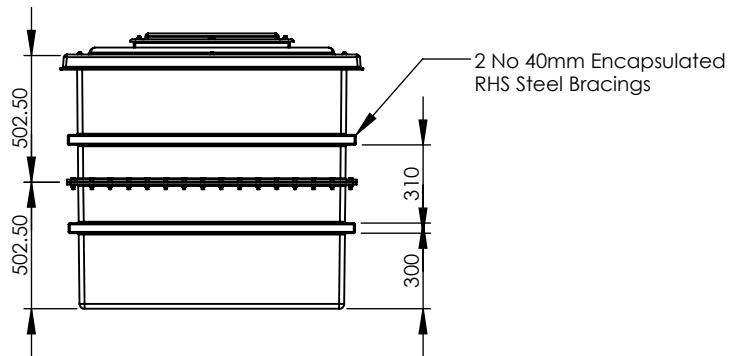

C

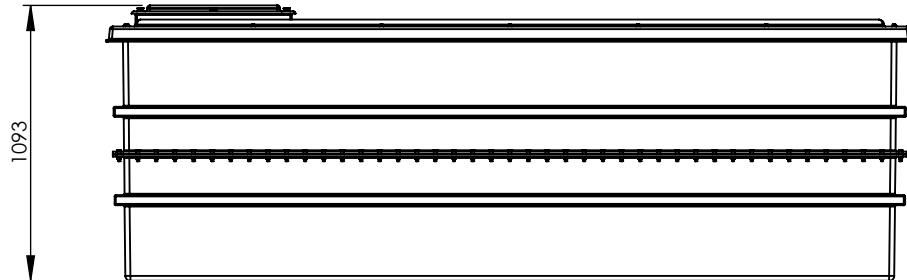

B

A

TITLE
PW3000.INS-2.AG

NOTE:

All Purewater tanks must be fully supported on a flat, level & continuous foundation providing structural support to the tank when full to maximum operating capacity. It is essential that the user refers to the conditions of installation document prior to the installation of the tank. Under no circumstances should the tank body be used to provide support to pipework and ancillary items. The tank lid is a structural part of the tank and must be in place and fitted correctly when water is contained within the tank.

DRAWN BY C.MORRIS DATE 05/12/2017

CUSTOMER

CUSTOMER
ALL DIMENSIONS +/- 5mm
UNLESS OTHERWISE STATED

A4

ALL DIMENSIONS IN MM - DO NOT SCALE

TANK SPECIFICATION :

DATE	VERSION	NOTES	
26/10/2017	A	FIRST ISSUE	
			INTERNAL DIMENSIONS 3000 x 1000 x 1000mm
			EXTERNAL DIMENSIONS 3202 x 1202 x 1093mm
			NOM. CAPACITY 3000 Litres
			DRY WEIGHT 195 KG
			INSULATION THICKNESS 25mm
			WRAS CERT. NUMBER 131006
			MATERIAL GRP

purewater
Storage Ltd

SCALE:1:30 SHEET 1 OF 1