

6

5

4


2

10

1

D

A technical drawing of a double door unit. The unit consists of two doors, each with a rectangular frame and a central panel. The overall width of the unit is indicated by a dimension line at the bottom labeled '2020'. To the left of the unit, a dimension line indicates a height of '1410' from the bottom to the top edge of the outer frame. The drawing uses black lines on a white background with no color.

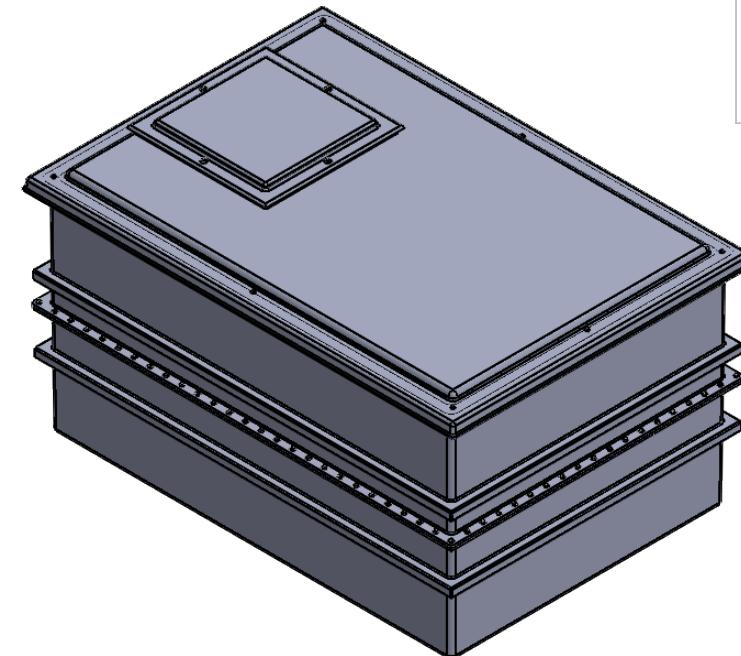

C

A technical line drawing of a double-decker bus. The bus is shown from a rear three-quarter perspective, highlighting its two levels. A vertical dimension line on the left indicates a height of 1109 units. The rear of the bus features a large, multi-paned window and a set of steps leading up to the upper deck. The drawing uses clean, black lines on a white background.

B

Technical drawing of a rectangular steel frame structure. The overall height is 510.50. The frame consists of two vertical columns and two horizontal beams. The top horizontal beam is labeled '2 No 40mm Encapsulated RHS Steel Bracings'. The distance between the top horizontal beam and the top of the frame is 273. The distance between the bottom horizontal beam and the bottom of the frame is 300. The distance between the two vertical columns is 510.50.

A

PW2272.INS-2.AG

NOTE:

**NOTE**  
All prewater tanks must be fully supported on a flat, level & continuous foundation providing structural support to the tank when full to maximum operating capacity. It is essential that the user refers to the conditions of installation document prior to the installation of the tank. Under no circumstances should the tank body be used to provide support to pipework and ancillary items. The tank lid is a structural part of the tank and must be in place and fitted correctly when water is contained within the tank.

## DESCRIPTION

PW2272-2 piece cold water storage tank  
suitable for AG/AF Air gap

DATE	VERSION	NOTES
02/10/2017	A	FIRST ISSUE

## TANK SPECIFICATION

INTERNAL DIMENSIONS	1828 x 1220 x 1016mm
EXTERNAL DIMENSIONS	2020 x 1410 x 1109mm
NOM. CAPACITY	2272 Litres
DRY WEIGHT	150 KG
INSULATION THICKNESS	25mm
WRAS CERT. NUMBER	131006
MATERIAL	GRP

pure water storage ltd

SCALE 1:25

6

5

4

2

1

1