

D

D

C





C

B

B

A

A

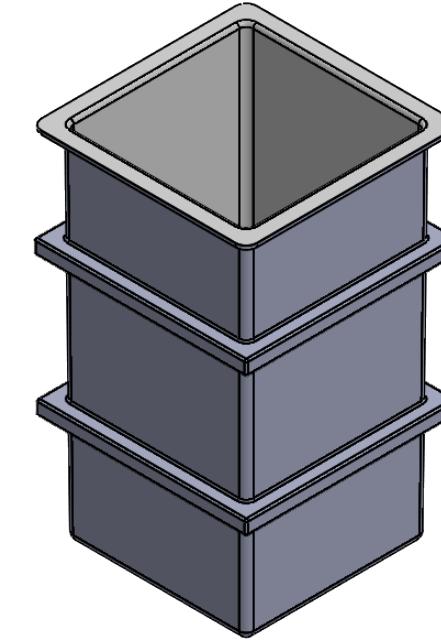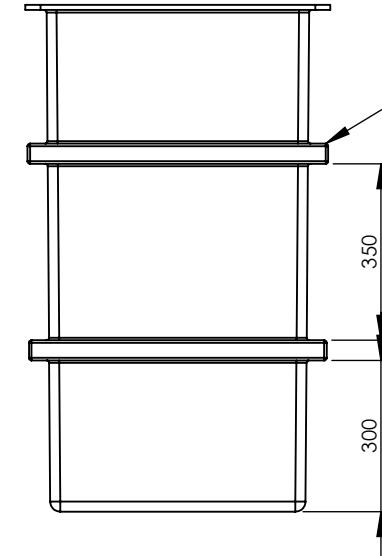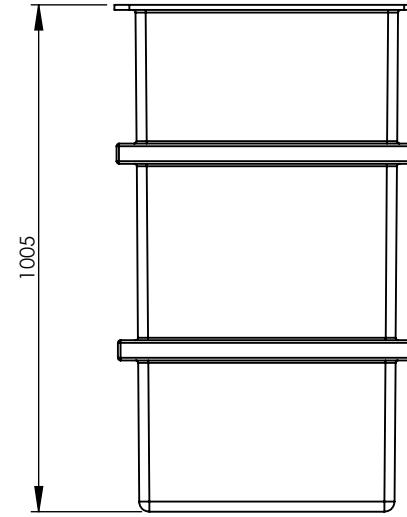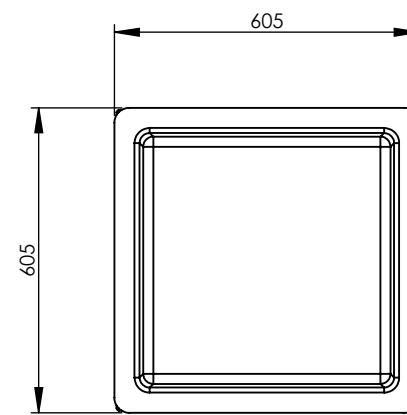

TITLE  
PW252.OPEN

NOTE:  
All Purewater tanks must be fully supported on a flat, level & continuous foundation providing structural support to the tank when full to maximum operating capacity. It is essential that the user refers to the conditions of installation document prior to the installation of the tank. Under no circumstances should the tank body be used to provide support to pipework and ancillary items.

DRAWN BY C.MORRIS DATE 22/01/2018

CUSTOMER

CUSTOMER  
ALL DIMENSIONS +/- 5mm  
UNLESS OTHERWISE STATED

A4

ALL DIMENSIONS IN MM - DO NOT SCALE

DATE  
22/01/2018

VERSION  
A

NOTES  
FIRST ISSUE

TANK SPECIFICATION :

INTERNAL DIMENSIONS	500 x 500 x 1000mm
EXTERNAL DIMENSIONS	605 x 605 x 1005mm
NOM. CAPACITY	250 Litres
DRY WEIGHT	39 KG
INSULATION THICKNESS	NONE
MATERIAL	GRP

SCALE : 1:15  
SHEET 1 OF 1

purewater storage ltd