
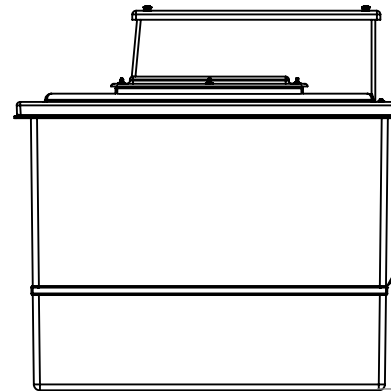
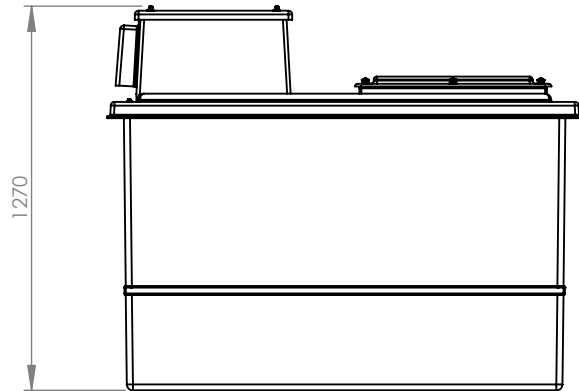
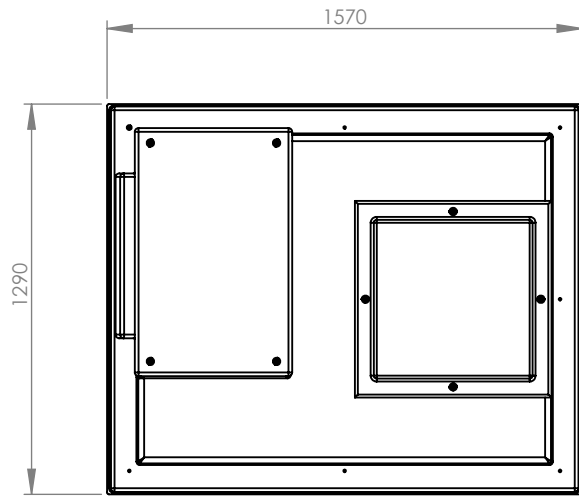


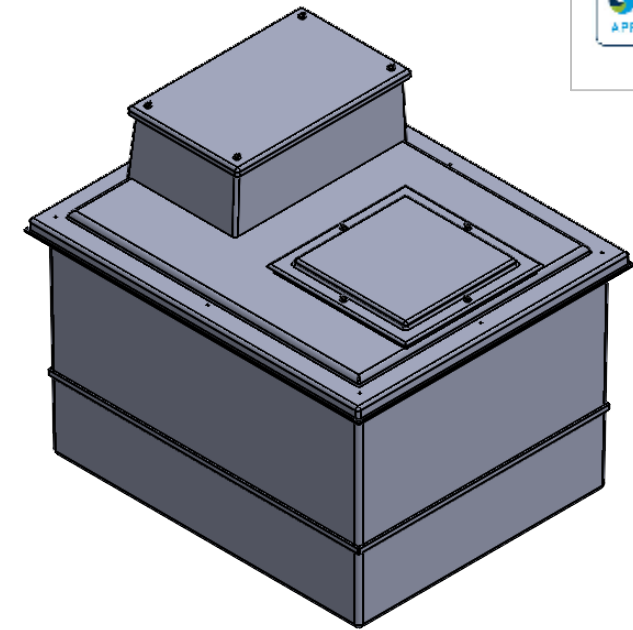

25mm Encapsulated
RHS Steel Bracing

310

TITLE
PW1364.INS.AB.4

DRAWN BY C.MORRIS DATE 09/05/2023

CUSTOMER

NOTE:
All Purewater tanks must be fully supported on a flat level & continuous foundation providing structural support to the tank when full to maximum operating capacity. It is essential that the user refers to the conditions of installation document prior to the installation of the tank. Under no circumstances should the tank body be used to provide support to pipework and ancillary items. The tank lid is a structural part of the tank and must be in place and fitted correctly when water is contained within the tank.

ALL DIMENSIONS +/- 5mm
UNLESS OTHERWISE STATED

A4

DESCRIPTION:

PW1364 one piece cold water storage tank
c/w raised float valve housing to provide an
AB Air gap

ALL DIMENSIONS IN MM - DO NOT SCALE

DATE	VERSION	NOTES
28/09/2017	A	FIRST ISSUE

TANK SPECIFICATION :

INTERNAL DIMENSIONS	1370 x 1092 x 915mm
EXTERNAL DIMENSIONS	1570 x 1290 x 1240mm
NOM. CAPACITY	1364 Litres
DRY WEIGHT	81 KG
INSULATION THICKNESS	25mm
WRAS CERT. NUMBER	131006
MATERIAL	GRP

purewater
storage ltd

SCALE:1:25

SHEET 1 OF 1