

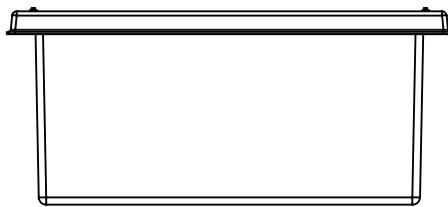
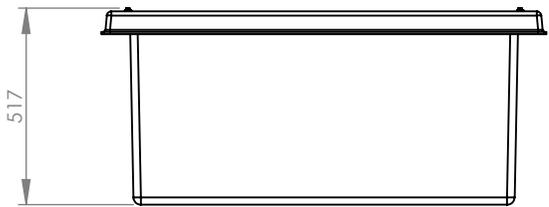


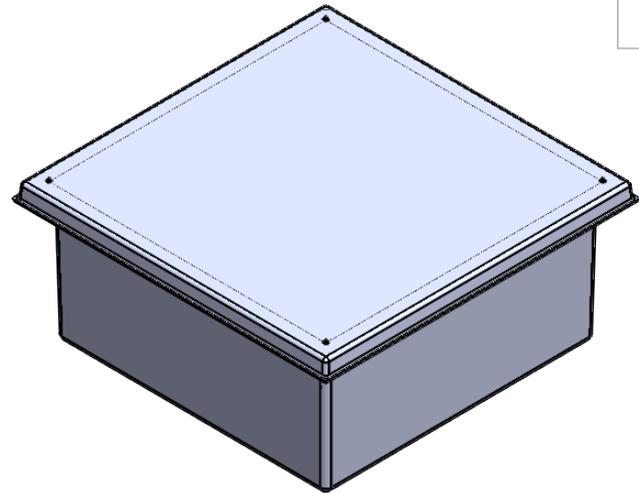

D  
C  
B  
A

D  
C  
B  
A

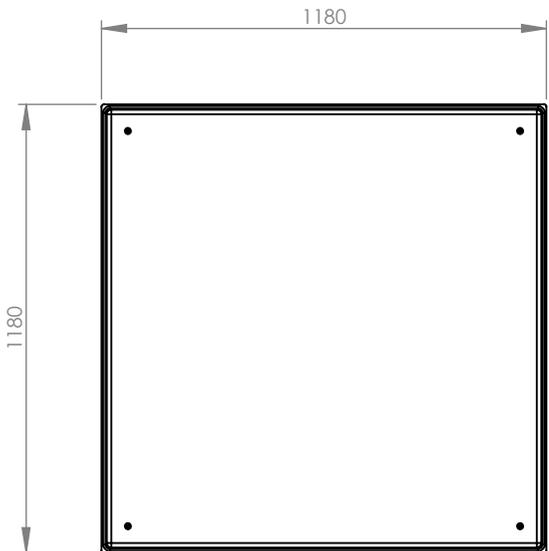

TITLE <b>PW500-UN</b>	
DRAWN BY J. Ellison	DATE 07/01/2022
CUSTOMER CUSTOMER	

<b>NOTE:</b> All Purewater tanks must be fully supported on a flat, level & continuous foundation providing structural support to the tank when full to maximum operating capacity. It is essential that the user refers to the conditions of installation document prior to the installation of the tank. Under no circumstances should the tank body be used to provide support to pipework and ancillary items. The tank lid is a structural part of the tank and must be in place and fitted correctly when water is contained within the tank.
ALL DIMENSIONS +/- 5mm UNLESS OTHERWISE STATED

<b>DESCRIPTION:</b> PW500-UN One piece cold water storage tank suitable for AG/AF Air gap
A4
ALL DIMENSIONS IN MM - DO NOT SCALE

DATE	VERSION	NOTES
07/01/2022	A	FIRST ISSUE

TANK SPECIFICATION :	
INTERNAL DIMENSIONS	1000 x 1000 x 500mm
EXTERNAL DIMENSIONS	1180 x 1180 x 517mm
NOM. CAPACITY	500 Litres
DRY WEIGHT	28 KG
INSULATION THICKNESS	NONE
WRAS CERT. NUMBER	131006
MATERIAL	GRP

SCALE: 1:20      SHEET 1 OF 1

6                      5                      4                      3                      2                      1