


Spirafix™ Anchors for Mooring Barges



- **Easy to Install** - Use a short handled builder's lump or club hammer to drive them in. They will cope with difficult obstacles such as bricks, roots and stones.
- **Easy to Remove** - Use the simple "T" bar to wind the anchor back out of the ground, or alternatively one can use an adjustable spanner.
- **Minimal Damage to Bank** - Due to the ease of which the anchors unscrew and their relatively small cross section they do almost no damage to the bank.
- **Take up Very Little Room** - These highly efficient anchors will pack into a small space. Their design enables them to nest together.

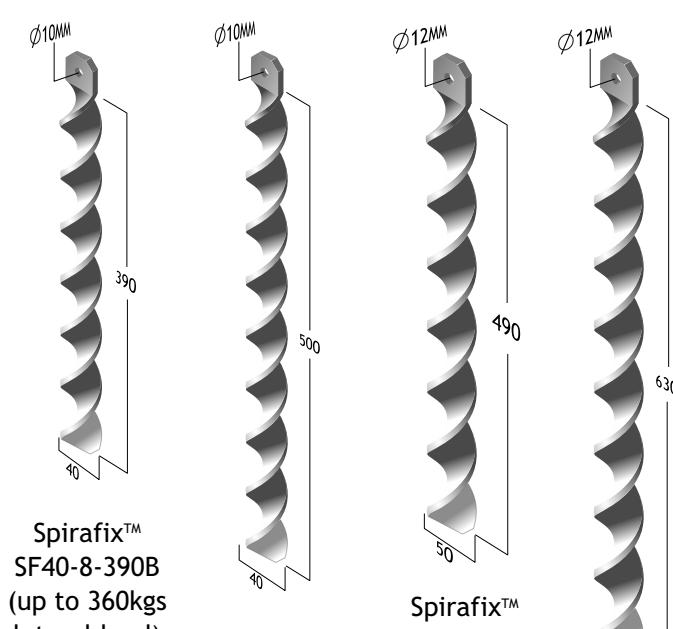

Spirafix™
SF40-8-390B
(up to 360kgs
lateral load)

Spirafix™
SF40-8-500B
(up to 460kgs
lateral load)

Spirafix™
SF50-10-0490B
(up to 500kgs
lateral load)

Spirafix™
SF50-10-0630B
(up to 700kgs
lateral load)

Barge Length		Recomended
metres	feet	Spirafix™
10	33	2 x SF40-8-390B
15	49	2 x SF40-8-500B
20	66	2 x SF50-10-0490B
25	82	2 x SF50-10-0630B
30	98	3 x SF50-10-0630B
35	115	4 x SF50-10-0630B



These anchors can be used with a 10mm or 12mm shackle padlock in place of the regular shackles for enhanced security.

