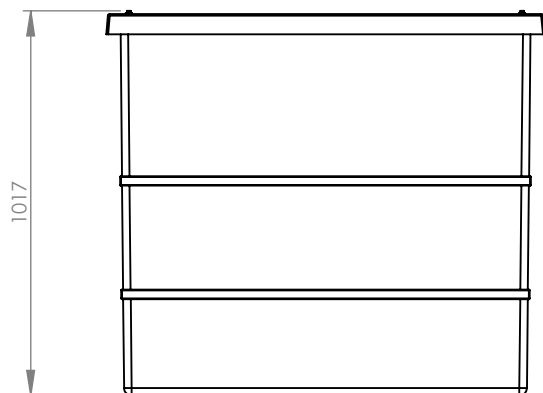
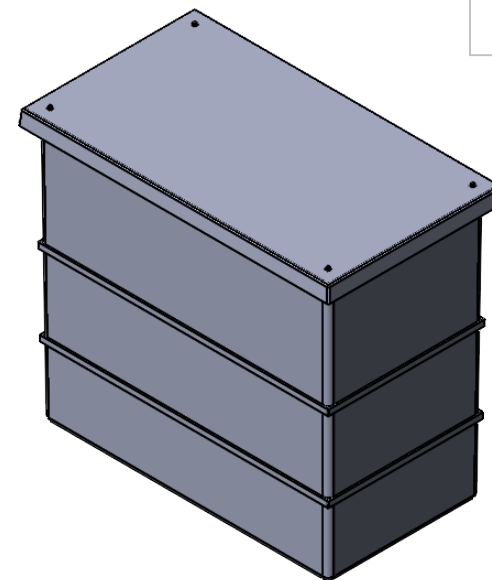
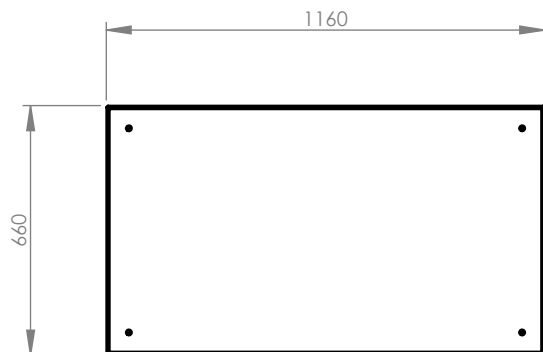


2 No 25mm Encapsulated
RHS Steel Bracings

275
250

TITLE		PW501.INS.AG	
DRAWN BY	C.MORRIS	DATE	04/05/2023
CUSTOMER	CUSTOMER		

NOTE	
All Purewater tanks must be fully supported on a flat level & continuous foundation providing structural support to the tank when full to maximum operating capacity. It is essential that the user refers to the conditions of installation document prior to the installation of the tank. Under no circumstances should the tank body be used to provide support to pipework and ancillary items. The tank lid is a structural part of the tank and must be in place and fitted correctly when water is contained within the tank.	
ALL DIMENSIONS +/- 5mm UNLESS OTHERWISE STATED	A4

DESCRIPTION:	PW501 one piece cold water storage tank suitable for AG/AF Air gap
ALL DIMENSIONS IN MM - DO NOT SCALE	

DATE	VERSION	NOTES
05/10/2017	A	FIRST ISSUE

TANK SPECIFICATION :	
INTERNAL DIMENSIONS	1000 x 500 x 1000mm
EXTERNAL DIMENSIONS	1160 x 660 x 1017mm
NOM. CAPACITY	500 Litres
DRY WEIGHT	42 KG
INSULATION THICKNESS	25mm
WRAS CERT. NUMBER	131006
MATERIAL	GRP

purewater storage ltd	
SCALE:1:20	SHEET 1 OF 1